



A drive axle that has a blown oil seal and the driver disconnected the push-rod from the slack adjuster so the brake would not operate or catch on fire.

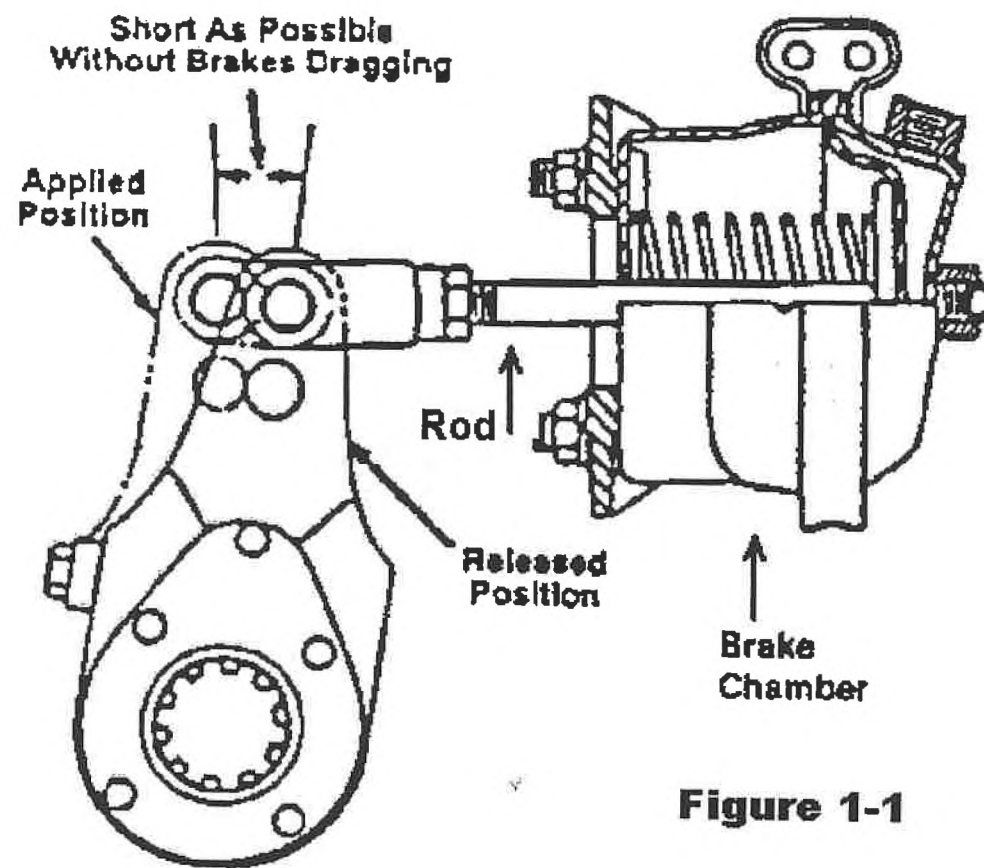


Figure 1-1

